

PureLink

EZ-D Owner's Manual

Detachable DVI over Fiber Optic Cable



PureLink™

535 East Crescent Avenue
Ramsey, NJ 07446
USA

Tel: +1.201.488.3232

Fax: +1.201.621.6118

E-mail: sales@purelinkav.com
www.purelinkav.com

For order support, please contact your local dealer.
For technical support, please contact us at support@purelinkav.com

TABLE OF CONTENTS

Chapter 1. Product Overview

1.1 Safety Precautions	-----	3
1.2 Product Description	-----	4
1.3 Product Features	-----	4
1.4 What's in the Box	-----	5
1.5 Installation Guidelines	-----	6

Chapter 2. Product Specifications

2.1 EZ-D Specification	-----	7
2.2 DVI Receptacle Pin Assignment	-----	7
2.3 Troubleshooting	-----	8
2.4 Maintenance	-----	8

Chapter 3. Additional Information

3.1 Manufacturer's Warranty (2-Year)	-----	9
3.2 Customer Service	-----	9

Chapter 1. Product Overview

1.1 Safety Precautions

- All safety instructions should be read and understood before the unit is operated.
- The owner's manual and safety instructions should be retained for future reference.
- Unplug this unit from the AV devices before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth only.
- Keep away from wet, magnetic, and flammable surfaces or substances.
- Do not place any heavy objects or equipment on top of the unit.

If you experience any malfunctioning of product or have any question as to operation of the product, please contact our customer service center.

PureLink™

Tel: 201.488.3232

Email: support@purelinkav.com

Welcome!

Congratulations on your purchase of the PureLink EZ-D Detachable DVI over Fiber Optic Cable. This manual contains information that will assist you in installing and operating the product.

1.2 Product Description

The TOTALWIRE™ EZ-D offers truly rugged detachable DVI body in a compact and reliable form supporting up to WUXGA (1920 x 1200) and 1080p with 36 bit Deep Color plus HDCP compliance at a distance of 100 meters without the need for an external power supply or additional extenders. With its ultra-thin, flexible cable with 22 lbs (10 kg) pulling weight and detachable DVI connector, the EZ-D delivers ultimate reliability and convenience.

All the Advantages, None of the Hassle

PureLink's TOTALWIRE EZ-D fiber cables make installation easier than ever. The removable connector transmitter body, combined with the thinnest cable available, allows the EZ-D to be effortlessly maneuvered through conduits – something previously impossible with DVI. Furthermore, the plug-n-play functionality requires no external power supply, as the transmitter and receiver bodies draw power from the source and sync respectively.

The EZ-D delivers ultimate reliability and convenience for an *EZ-In, EZ-Out* fiber transport solution.

1.3 Product Features

- Supports all PC and HDTV resolutions up to WUXGA (1920 x 1200 @ 60Hz), 1080p
- Support with 36-bit Deep Color
- Pre-terminated lengths up to 100 meters (328 ft.)
- Detachable DVI connector makes easy in-wall installation.
- Plug-n-play (no additional power supply required)
- HDCP Compliant
- Plenum-rated cable
- Immune from EMI and RFI
- No signal loss
- Connectors equipped with a protective pulling cap

Common Application

- Digital Home Theater
- Conference Room AV System
- Medical Display System

- Data Center
- Digital Signage

1.4 What's in the Box

- **EZ-D series DVI Fiber Optic Cable** : One (1) unit
- **User's Manual**



Figure 1 – EZ-D Series DVI over Fiber Optic Cable

- **Hardware requirements**
 - You have to have a video source that has DVI output port such as PC, media player, portable devices with appropriate adapter/converter. It should support the maximum graphic resolution feature of displays to be connected.
 - No special requirements memory size, CPU speed and chipsets, if you've already properly installed your DVI graphic controllers or cards.

□ **Software requirements**

- No requirements.

1.5 Installation

Important : Please use the installation procedure below. Improper or no operation may result if the start up sequence is not correctly followed.

1. Carefully unpack the contents of the shipping group
2. Turn off the entire system before connecting
3. Run fiber optic cable between source and the display
4. Connect Tx (Video Source) DVI connector to the fiber optic cable's source side



5. Connect Rx (Display) DVI connector to the fiber optic cable's display side




3. Plug directly the Tx (Video Source) connector of EZ-D cable in the DVI output port of your video source. Make sure cable is firmly inserted.
4. Plug the Rx (Display) connector of EZ-D cable to the DVI input port of display (HDTV, Plasma screen, Projector, etc). Make sure cable is firmly inserted.
5. Turn power on the source and the display

Chapter 2. Product Specifications

2.1 EZ-D Specification

Item	Description
Model	EZ-D
Input type	DVI, 1 port
Output type	DVI, 1 port
Graphic Resolution	VGA / SVGA / XGA / UXGA / WUXGA 480i/p , 720i/p , 1080i/p
Available Cable Length	EZ-D-010 : 33 ft (10 m) EZ-D-020 : 66 ft (20 m) EZ-D-030 : 100 ft (30 m) EZ-D-040 : 133 ft (40 m) EZ-D-050 : 165 ft (50 m) EZ-D-070 : 231 ft (70 m) EZ-D-100 : 330 ft (100 m)
Cable Jacket Material	Plenum Rated PVC
Cable Inner-jacket Material	Plastic Optical Fiber and Copper
Cable Diameter	0.12" (3 mm)
Bend Radius	0.2" (5 mm) minimum
Pull weight	22 lbs (10 kg)
Compliance	DVI, HDCP
Operating Temperature	32° - 122° F (0° - 50° C)
Operating Humidity	5% - 85% RH
Power	5V via DVI pin # 14
Power Consumption	0.07 watts

2.2 DVI Receptacle Pin Assignment

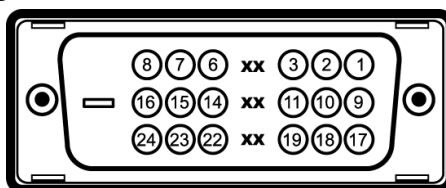

DVI-D Connector Pin Assignment

Pin No.	Signal Name	Pin No.	Signal Name
1	TMDS Data 2 -	14	+5V
2	TMDS Data 2 +	15	DDC Ground
3	TMDS Data 2 Shield	16	Hot Plug Detect
6	DDC Clock	17	TMDS Data 0 -
7	DDC Data	18	TMDS Data 0 +
8		19	TMDS Data 0 Shield
9	TMDS Data 1 -	22	TMDS Clock Shield
10	TMDS Data 1 +	23	TMDS Clock +
11	TMDS Data1 Shield	24	TMDS Clock -

2.3 Troubleshooting

The display shows only black screen.

- Ensure that the DVI ports are firmly plugged in to the source and display.
- Ensure that the Video source (Tx) is connected to the video source and Display (Rx) is connected to the display.
- Check if the source and display are powered on and properly booted.
- Re-boot up the system while connecting the optical DVI extension module.

Screen is distorted or displays noises.

- Check if the graphic resolution is properly set for the sources. For PCs, go to the display properties of Windows and tap the settings. For other AV video source, refer to the owner's manual to adjust video resolution.
- Reboot the system. Disconnect the optical DVI cables if necessary.

2.4 Maintenance

No special maintenance is required for the EZ-D DVI over Fiber Optic Cable. Ensure that the EZ-D unit is stored or used in a benign environment free from liquid or dirt contamination. There are no user serviceable parts. Refer all service and repair issues to PureLink.

Chapter 3. Additional Information

3.1 Manufacturer's Warranty (3-Year)

PureLink warrants this EZ-D DVI over Fiber Optic Cable to be free from defects in workmanship and materials, under normal use and service, for a period of three (3) year from the date of purchase from PureLink or its authorized resellers.

If the product does not operate as warranted during the applicable warranty period, PureLink shall, at its option and expense, execute one of the following as necessary:

1. Repair the defective product or part
2. Deliver to customer and equivalent product or part to replace the defective item
3. Refund to customer the purchase price paid for the defective product

All products that are replaced become the property of PureLink. Replacement products may be new or reconditioned. Repaired or replacement products or parts come with a 90-day warranty or the remainder of the warranty period. PureLink shall not be responsible for any software, firmware, information, or memory data loss of contained in, stored on, or integrated with any products returned to PureLink for repair under warranty.

3.2 Customer Service

Any customer service inquiries can be submitted electronically through the Q&A form on our website (www.purelinkav.com).

For immediate assistance please contact us at (201) 488-3232 to reach our customer care or tech support team.