

# PureLink

## PureMedia 4K Fiber Optic Extenders Owner's Manual



PM-FT101-U : PureMedia HDMI to Fiber Optic (1 LC) Extender Transmitter



PM-FR101-U : PureMedia Fiber Optic (1 LC) to HDMI Extender Receiver

### PM Series Fiber Optic Standalone and Wall-plate type Extender

**PureLink™**  
535 East Crescent Ave  
Ramsey, NJ 07446  
Tel: 201.488.3232  
Fax: 201.621.6118

Website : [www.purelinkav.com](http://www.purelinkav.com)  
E-mail : [info@purelinkav.com](mailto:info@purelinkav.com)

For Technical Support, contact us at  
: [support@purelinkav.com](mailto:support@purelinkav.com)

---

# TABLE OF CONTENTS

## Chapter 1. Introduction

1.1 Safety Precautions .....	3
1.2 Product Introduction .....	4
1.3 Package Contents .....	4

## Chapter 2. Features and Specifications

2.1 Features .....	5
2.2 Transmitter Specifications .....	7
PM-FT101-U.....	7
PM-FT102-U .....	9
PM-FT103-U .....	11
Transmitters Compatibility Chart .....	13
2.3 Receiver Specifications .....	14
PM-FR101-U .....	14
PM-FR102-U .....	16
PM-FR103-U .....	21
Receivers Compatibility Chart .....	23
2.4 Operation and Reliability Specification .....	24

## Chapter 3. Installation and Operating Instruction

3.1 Installation .....	25
3.2 Operating Instruction .....	26
3.3 Cable Termination .....	26
3.4 Connector Pin Assignment .....	27

## Chapter 4. Additional Information

4.1 Warranty .....	29
4.2 FCC/CE Statement .....	30

## Chapter 1. Introduction

### 1.1 Safety Precautions

When using and installing Dtrovision PureLink product, adhere to the following basic safety precautions.

- Read and understand all instructions before using and installing this product.
- The safety and operating instructions should be retained for future reference.
- Always use the correct external power supply (indicated on the product label) when operating this unit.
- Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- Mishandling of this product may lead to a fire or explosion hazard.
- Do not place any heavy objects or equipment on top of the product.
- Keep away from wet, magnetic, and flammable surfaces or substances.
- Air vents should be kept clean and unobstructed at all times.
- Any external impact may cause damage to the operation of this unit.
- Be sure this product is properly grounded (earthed) in order to prevent the risk of electrical shock.
- Turn off and unplug power before adding or removing Input/Output Boards.
- Input/Output Boards may be damaged when they are replaced with power turned on.
- Use surge protectors and/or AC line conditioners when powering this product.
- Only use a fuse(s) with the correct fuse rating in your enclosure.
- Make sure the product is on or attached to a stable surface.

**If you experience any malfunctioning of product or have any question as to operation of the product, please contact our customer service center.**

**Dtrovision LLC**

**Tel: 201.488.3232**

**Email: [support@purelinkav.com](mailto:support@purelinkav.com)**

## Welcome!

Congratulations on your purchase of the PureLink PureMedia Fiber Optic (1 LC) extender. This manual contains information that will assist you in installing and operating the product.

### 1.2 Product Introduction

#### **Pure fiber optic cable for video, audio, and control signal**

PureMedia Fiber Optic (1 LC) extension system is designed to transmit video (DVI, HDMI or VGA), audio (Embedded or analog stereo audio), control (RS232) over a **pure LC to LC fiber optic cable** for long distance up to 32,808ft (10km). This optical connection enables to minimize electrical noise and EMI free that is ideal for long distance extension of high definition HDMI/DVI or VGA video signal, HDMI embedded audio or 3.5mm stereo analog audio, and control signal.

### 1.3 Package Contents

**Please make sure all of the following items are included in the package:**

- 1) One of PM-FT101-U, FT102-U, FT103-U Transmitter Module or
- 2) One of PM-FR101-U, FR102-U, FR103-U Receiver Module
- 3) 3pin Phoenix Connector for RS-232
- 4) DC 12V Power Supply Unit with a Power Cord
- 5) User's Manual
- 6) Option Product:
  - TWF1 (1 LC Fiber Optic Cable with TotalWire Technology)
  - PI (PureLink's PureInstall HDMI cable with TotalWire Technology)

## Chapter 2. Features and Specifications

### 2.1 Features

➤ **Zero loss & Zero noise delivery**

Zero loss & zero noise delivery of digital high definition video and audio signal using Fiber optic connection, PureMedia Fiber Optic (1 LC) extender delivers HD signals over single fiber optic cables without loss or digital interference maintaining the clarity and colors. Noise cancellation and error correction logic enhances HD video and audio signals over long distance.

➤ **Compact and Robust enclosure design**

Compact and robust enclosure design allows for discreet installation behind a flat-panel display.

➤ **Uncompressed high definition video up to 4K2K@30Hz@48bits and 3D**

➤ **Bi-Directional RS232 interface**

Commands and data can flow in both directions via RS232, allowing status requests and control of the destination unit.

➤ **Max. Data Rate- 10.2 Gbps**

➤ **HDCP (High-bandwidth Digital Content Protection) Support**

➤ **Audio transmission support LPCM 7.1@192KHz, Dolby TrueHD, DTS-HD MA**

➤ **Transmitters directly compatible with PureMedia Fiber Optic Input Board**

PureMedia Fiber Optic (1 LC) Transmitters can send signal directly to PureMedia Matrix Switcher's Fiber Optic Input Board, eliminating the need of matching Receiver.

➤ **Receivers directly compatible with PureMedia Fiber Optic Output Board**

PureMedia Fiber Optic (1 LC) Receivers can receive signal directly from PureMedia Matrix Switcher's Fiber Optic Output Board, eliminating the need of matching Transmitter.

➤ **HDMI v1.4, 3D Support**

Adopting latest HDMI version 1.4 enables to support 3D, 48-Bit Deep Color, 4K x 2K resolution and 7.1 Channel Dolby TrueHD & DTS MasterHD

➤ **Real Time EDID**

PureLink's real time EDID features failsafe, constant and continuous EDID for source devices.

➤ **Various Transmitter and Receiver Choices**

There are three different types of transmitters and three different types of receivers to make today's sophisticated digital AV environment simple and flexible.

➤ **RF 1RU Rack Mountable Version Available**

PM-FT101-U, PM-FT102-U, PM-FR101-U, and PM-FR102-U are also available in PureLink's popular RF Rack Mountable Extension Center Modules.

➤ **Analog Support (VGA and Component)**

On PM-FT102-U and PM-FT103-U series, there are two video inputs; DVI/HDMI and VGA, which are selectable via front panel button or serial command when it is connected PureMedia Matrix Switcher. VGA port is designed to take component (YPbPr) signal with appropriate adapters or cables.

➤ **USB Firmware Update**

➤ **Long Distance Transmission up to 32,808ft (10 km)**

➤ **Plug-N-Play**

## 2.2 Specifications

### Transmitters :

#### PM-FT101-U : Standalone type

Input : HDMI + 3.5mm stereo audio (x1) + RS-232

Output : Fiber Optic (1 LC)

32,808ft, Compatible with PM-FIS4-U input board



**PM-FT101-U : PureMedia HDMI to Fiber Optic (1 LC) Extender Transmitter**

#### Front Connection Ports:

- Power S/W: Power On/Off switch
- Status LED: Video signal presence indicator
- Firmware: USB firmware update port

#### Back Connection Ports:

- HDMI/DVI In: HDMI/DVI input port
- Audio In: Stereo audio input port
- Optical: 1 LC Fiber Optic output port
- RS-232: RS-232 communication port
- DC In: DC 12V Power port

Model Name	PM-FT101-U
Input Signal	DVI / HDMI (TMDS), 3.5mm stereo audio
Output Signal	Fiber Optical Output ( > -10dbm (after 32,808ft (10km) transmission))
Extinction Ratio	> 4db (after 32,808ft (10km) transmission)
Data Transmission Speed	3.4 Gbps/ch, Total 10.2 Gbps Max
Supporting Display Resolutions	PC : VGA ~ WUXGA (up to 1920 x 1200 @60Hz) HDTV : 480i ~ 1080p, Up to Ultra HD 4K 4096 x 2160 @ 24/25/30Hz (RGB/YCbCr 4:4:4 8 bits, YCbCr 4:2:2 8/10/12 bits) 4096 x 2160 @50/60Hz (YCbCr 4:2:0 8 bits)
Max. Distance	Single Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 32,808 ft (10km) Multi Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 1,650 ft (500m)
Connector Type	DVI 29P/HDMI 19P Female (x 1) 3.5mm Stereo Jack 1 LC Optical Connector 3P /3.5MM Terminal Block (for Power) 3P /3.5MM Terminal Block (for RS-232) Mini USB (for firmware update)
Conformations	DVI 1.0 , HDMI 1.4b
HDCP Compliance	Yes, HDCP version 2.0
Power Rating	DC +12V, 4Watts Max
Dimension (W x D x H)	5.75" x 4.5" x 1.25" (144.78 x 114.3 x 31.75 mm)
Weight	0.5 lbs (0.23 Kg)



**PM-FT102-U : Standalone type (2x1 switch)**

**Input : Selectable HDMI/DVI or VGA + 3.5mm stereo audio (x1) + RS-232**

**Output : Fiber Optic (1 LC)**

**32,808ft, Compatible with PM-FIS4-U input board**



**PM-FT102-U : PureMedia HDMI/VGA to Fiber Optic (1 LC) Extender Transmitter**

**Front Connection Ports:**

- Power S/W: Power On/Off switch
- Status LED: Video signal presence indicator
- HDMI LED: HDMI signal indicator
- VGA LED: VGA (or component) signal indicator
- VGA EDID : EDID save button for VGA input port
- Firmware: USB firmware update port

**Back Connection Ports:**

- HDMI/DVI In: HDMI/DVI input port
- VGA In: VGA (or component) input port
- Audio In: Stereo audio input port
- Optical: 1 LC Fiber Optic output port
- RS-232: RS-232 communication port
- DC In: DC 12V Power port

Model Name	PM-FT102-U
Input Signal	DVI / HDMI (TMDS), VGA (supports YPbPr component) 3.5mm stereo audio
Output Signal	Fiber Optical Output ( > -10dbm (after 32,808ft (10km) transmission))
Extinction Ratio	> 4db (after 32,808ft (10km) transmission)
Data Transmission Speed	3.4 Gbps/ch, Total 10.2 Gbps Max
Supporting Display Resolutions	PC : VGA ~ WUXGA (up to 1920 x 1200 @60Hz) HDTV : 480i ~ 1080p, Up to Ultra HD 4K 4096 x 2160 @ 24/25/30Hz (RGB/YCbCr 4:4:4 8 bits, YCbCr 4:2:2 8/10/12 bits) 4096 x 2160 @50/60Hz (YCbCr 4:2:0 8 bits)
Max. Distance	Single Mode Fiber : 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 32,808 ft (10km) Multi Mode Fiber : 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 1,650 ft (500m)
Connector Type	DVI 29P/HDMI 19P Female VGA Female 3.5mm Stereo Jack 1 LC Optical Connector 3P /3.5MM Terminal Block (for Power) 3P /3.5MM Terminal Block (for RS-232) Mini USB (for firmware update)
Conformations	DVI 1.0 , HDMI 1.4b
HDCP Compliance	Yes, HDCP version 2.0
Power Rating	DC +12V, 4Watts Max
Dimension	5.75" x 4.5" x 1.75" (144.78 x 114.3 x 44.45 mm)
Weight	1.0 lbs (0.46 Kg)

**PM-FT103-U : Wall plate type (2x1 switch), 2 Gang Decora style, white finish.**

**Input : Selectable HDMI or VGA + 3.5mm stereo audio (x1) + RS-232**

**Output : Fiber Optic (1 LC)**

**32,808ft, Compatible with PM-FIS4-U input board**



**PM-FT103-U : PureMedia HDMI/VGA to Fiber Optic (1 LC) Extender Transmitter, Wall plate**

**Front Connection Ports:**

- Power LED: Power status indicator
- Status LED: Video signal presence indicator
- HDMI LED: HDMI signal indicator
- VGA LED: VGA (or component) signal indicator
- VGA EDID: EDID save button for VGA input port
- HDMI/DVI In: HDMI/DVI input port
- VGA In: VGA (or component) input port
- Audio In: Stereo audio input port
- RS-232: RS-232 communication port

**Back Connection Ports:**

- 1 LC: Fiber Optic Output Port
- DC In: DC 12V Power port

Model Name	PM-FT103-U
Input Signal	DVI / HDMI (TMDS), VGA (supports YPbPr component) 3.5mm stereo audio
Output Signal	Fiber Optical Output ( > -10dbm (after 32,808ft (10km) transmission))
Extinction Ratio	> 4db (after 32,808ft (10km) transmission)
Data Transmission Speed	3.4 Gbps/ch, Total 10.2 Gbps Max
Supporting Display Resolutions	PC : VGA ~ WUXGA (up to 1920 x 1200 @60Hz) HDTV : 480i ~ 1080p, Up to Ultra HD 4K 4096 x 2160 @ 24/25/30Hz (RGB/YCbCr 4:4:4 8 bits, YCbCr 4:2:2 8/10/12 bits) 4096 x 2160 @50/60Hz (YCbCr 4:2:0 8 bits)
Max. Distance	Single Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p : 6,600 ft (2km) Multi Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p : 1,650 ft (500m)
Connector Type	HDMI 19P Female VGA Female 3.5mm Stereo Jack 1 LC Optical Connector 3P /3.5MM Terminal Block (for Power) 3P /3.5MM Terminal Block (for RS-232)
Conformations	DVI 1.0 , HDMI 1.4b
HDCP Compliance	Yes, HDCP version 2.0
Power Rating	DC +12V, 4Watts Max
Dimension	2 Gang Decora style, actual dimension will be updated
Weight	0.5 lbs (0.23 Kg)

### Transmitter Input Signal Characteristics

Input Signal	Description	Unit	Min	Typical	Max	Remarks
DC input	DC Voltage	VDC	11.5	12	12.5	
	Power Consumption	Watts	13.5	13.8	14.4	
VGA input (15Pin)	Video Level	mVp-p		700		
DVI input (29Pin DVI)	Differential Output	mVp-p	450	510	570	TMDS Interface
HDMI input (19Pin)	Differential Output	mVp-p	400		600	TMDS Interface

**Transmitter Output Signal Characteristics**

Output Signal	Symbol	Unit	Min	Typical	Max	Remarks
Emission Center Wavelength	λc1	nm	1260	1310	1360	
	λc2		1480	1550	1580	

**Analog Video Signal Supported Resolution**

- 640*480 60Hz	- 1024*768 60Hz	- 720*480p 60Hz
- 640*480 72Hz	- 1024*768 70Hz	- 720*576p 50Hz
- 640*480 75Hz	- 1024*768 75Hz	- 1280*720p 60Hz
- 640*480 85Hz	- 1024*768 85Hz	- 1280*720p 50Hz
- 800*600 56Hz	- 1280*1024 60Hz	- 1920*1080i 60Hz
- 800*600 60Hz	- 1280*1024 75Hz	- 1920*1080i 50Hz
- 800*600 72Hz	- 1280*1024 85Hz	- 1920*1080p 60Hz
- 800*600 75Hz	- 1600*1200 60Hz	- 1920*1080p 50Hz
- 800*600 85Hz	- 1920*1200 60Hz	

**Digital Video Signal Supported Resolution:**

- PC resolution: VGA ~ WUXGA @ 60Hz (1920 x 1200 @ 60Hz)
- HDTV resolution: 480i ~ 1080p @ 60Hz, 4K2K

**PureMedia Fiber Optic Transmitter Compatibility Chart**

Transmitters Compatibility	PM-FT101-U	PM-FT102-U	PM-FT103-U
PureMedia Modular Extender Compatibility	PM-FR101-U PM-FR102-U PM-FR103-U	PM-FR101-U PM-FR102-U PM-FR103-U	PM-FR101-U PM-FR102-U PM-FR103-U
PureMedia RF Extender Compatibility	PM-FR101-U-RF PM-FR102-U-RF	PM-FR101-U-RF PM-FR102-U-RF	PM-FR101-U-RF PM-FR102-U-RF
PureMedia Matrix Board Compatibility	PM-FIS4-U	PM-FIS4-U	PM-FIS4-U

**Receivers :**

**PM-FR101-U : Standalone type.**

**Input : Fiber Optic (1 LC)**

**Output : HDMI + 3.5mm stereo audio + RS-232**

**32,808ft, Compatible with PM-FOS4-U output board**



**PM-FR101-U : PureMedia Fiber Optic (1 LC) to HDMI Extender Receiver**

**Front Connection Ports:**

- Power S/W: Power On/Off switch
- Status LED: Video signal presence indicator
- Firmware: USB firmware update port

**Back Connection Ports:**

- HDMI/DVI Out: HDMI/DVI output port
- Audio Out: Stereo audio output port
- Optical: 1 LC Fiber Optic output port
- RS-232: RS-232 communication port
- DC In: DC 12V Power port

Model Name	PM-FR101-U
Input Signal	Fiber Optical Output ( > -10dbm (after 32,808ft (10km) transmission))
Extinction Ratio	> 4db (after 32,808ft (10km) transmission)
Output Signal	DVI / HDMI (TMDS), 3.5mm stereo audio
Data Transmission Speed	3.4 Gbps/ch, Total 10.2 Gbps Max
Supporting Display Resolutions	PC : VGA ~ WUXGA (up to 1920 x 1200 @60Hz) HDTV : 480i ~ 1080p, Up to Ultra HD 4K 4096 x 2160 @ 24/25/30Hz (RGB/YCbCr 4:4:4 8 bits, YCbCr 4:2:2 8/10/12 bits) 4096 x 2160 @50/60Hz (YCbCr 4:2:0 8 bits)
Max. Distance	Single Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 32,808 ft (10km) Multi Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 1,650 ft (500m)
Connector Type	DVI 29P/HDMI 19P Female 3.5mm Stereo Jack 1 LC Optical Connector 3P /3.5MM Terminal Block (for Power) 3P /3.5MM Terminal Block (for RS-232) Mini USB (for firmware update)
Conformations	DVI 1.0 , HDMI 1.4b
HDCP Compliance	Yes, HDCP version 2.0
Power Rating	DC +12V, 2.0 Watts Max
Dimension	5.75" x 4.5" x 1.25" (144.78 x 114.3 x 31.75 mm)
Weight	0.5 lbs (0.23 Kg)

**PM-FR102-U : Standalone type. Built-in auto scaler**

**Input : Fiber Optic (1 LC)**

**Output : HDMI + 3.5mm stereo audio + RS-232**

**32,808ft, Compatible with PM-FOS4-U output board**



**PM-FR102-U : PureMedia Fiber Optic (1 LC) to HDMI Extender Receiver w/Scaling**

**Front Connection Ports:**

- Power S/W: Power On/Off switch
- LCD Display: 16x2 LCD Display

**Back Connection Ports:**

- Signal LED: Video signal presence indicator
- Link LED: Link Status indicator
- Firmware: USB firmware update port
- HDMI Out: HDMI output port
- Audio Out: Stereo audio output port
- RS-232: RS-232 communication port
- DC In: DC 12V Power port

Model Name	PM-FR102-U
Input Signal	Fiber Optical Output ( > -10dbm (after 32,808ft (10km) transmission))
Extinction Ratio	> 4db (after 32,808ft (10km) transmission)
Output Signal	DVI / HDMI (TMDS), 3.5mm stereo audio
Data Transmission Speed	3.4 Gbps/ch, Total 10.2 Gbps Max
Supporting Display Resolutions	PC : VGA ~ WUXGA (up to 1920 x 1200 @60Hz) HDTV : 480i ~ 1080p, Up to Ultra HD 4K 4096 x 2160 @ 24/25/30Hz (RGB/YCbCr 4:4:4 8 bits, YCbCr 4:2:2 8/10/12 bits) 4096 x 2160 @50/60Hz (YCbCr 4:2:0 8 bits)
Max. Distance	Single Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p, Ultra HD 4K : 32,808 ft (10km) Multi Mode Fiber: 1920 x 1200 @ 60Hz or at 1080p,



Ultra HD 4K : 1,650 ft (500m)	
Connector Type	DVI 29P/HDMI 19P Female 3.5mm Stereo Jack 1 LC Optical Connector 3P /3.5MM Terminal Block (for Power) 3P /3.5MM Terminal Block (for RS-232) Mini USB (for firmware update)
Conformations	DVI 1.0 , HDMI 1.4b
HDCP Compliance	Yes, HDCP version 2.0
Power Rating	DC +12V, 4 Watts Max
Dimension	7.5" x 6.0" x 1.65" (190 x 150 x 42 mm)
Weight	1.5 lbs. (0.68 Kg)
User Control	6 Buttons Control (LCD and OSD)

4K Scaling For PureMedia Output Resolutions		
4096x2160 @50/60Hz YCbCr 4:2:0 8bits	SXGA (1280x1024 @85Hz)	1080p (50Hz)
4096x2160 @24/25/30Hz RGB/YCbCr 4:4:4 8bits YCbCr 4:2:2 8/10/12 bits	SXGA (1280x1024 @75Hz)	1080i (60Hz)
3480x2160 @30Hz	SXGA (1280x1024 @60Hz)	1080i (59Hz)
2560x1600 @60Hz	XGA (1024x768 @85Hz)	1080i (59Hz)
1920x1200 @60Hz	XGA (1280x1024 @75Hz)	1080i (50Hz)
1400x900 @60Hz	XGA (1280x1024 @60Hz)	720p (60Hz)
1366x768 @60Hz	SVGA(800x600 @75Hz)	720p (59Hz)
1360x768 @60Hz	SVGA(800x600 @60Hz)	720p (50Hz)
UXGA (1600x1200 @60Hz)	1080p (60Hz)	576p (50Hz)
	1080p (59Hz)	480p (60Hz)

## PM-FR102-U Operation

There are 2 information that can be checked from the front LCD panel.

1. Video output resolution
2. Video input resolution

Press right or left button on the front to toggle the information.



<PIC. Right or Left arrow>



<PIC. Current video input resolution is 1920x1080>



<PIC. Current video output resolution is 1920x1080>

If there is no signal coming in, it will be shown as No Signal on the video input.

If the display is turned off or is not connected, it will be shown as Not Connected on the video output.

**Menu Function.**

There are 5 functions in the menu.

1. Output format
2. Power Save
3. EDID Setup
4. System Check
5. Version Info

The functions can be selected by pressing UP, DOWN AND MENU(Enter) button on the front.



<PIC. UP and DOWN Button>

**1. Output format**

The output format is a function to select the video out timing.

720x480p 59.94 Hz	720x576p 50 Hz	1280x720p 50 Hz	1280x720p 59.9 Hz
1280x720p 60 Hz	1920x1080i 50 Hz	1920x1080i 59.9 Hz	1920x1080i 60 Hz
1920x1080p 50 Hz	1920x1080p 59.9 Hz	1920x1080p 60 Hz	800x600 60 Hz
1024x768 60 Hz	1280x1024 60 Hz	1360x768 60 Hz	1366x768 60 Hz
1440x900 60 Hz	1400x1050 60 Hz	1600X1200 60 Hz	1920X1200 60 Hz
3840x2160 24 Hz	3840x2160 30 Hz	Bypass mode	Auto time set

.<Out timing selections in the PM-CR102-U>

\*Default setting is on auto time set.

Auto time set adjusts with the displays default/best resolution it can handle and will send video accordingly.

(EX. If a display can only handle up to 3840x2160 30hz, and the source is sending a 1920x1080p 60hz, it will automatically upscale to 3840x2160 30hz. If a display can handle up to 1920x1080p 60hz, but the source is sending 3820x2160 30hz, it will automatically down scale to 1920x1080p 60hz.)

Bypass mode will receive and send the resolution without any alteration.

(EX. If a source resolution is 1920x1080i 59hz, it will send 1920x1080i 59hz to the display)

Other resolution can be selected to force the output resolution.

(EX. If a display has a 3840x2160 30hz as a default resolution but 1920x1200 60hz needs to be sent, selecting 1920x1200 60hz from the selection would force the 1920x1200 60hz resolution to the output.)

## 2. Power Save

This function will allow to select the power save mode.

1. Off
2. 5 Minute
3. 10 Minute

We recommend using Off mode unless the unit is not being used frequently.

## 3. EDID Setup

EDID setup function will save the EDID to the input of the PM-FR102-U from external or internal EDID library.

1024x768 60 Hz	1280x1024 60 Hz	1360x768 60 Hz	1366x768 60 Hz
1920x1080 60 Hz	1920x1200 60 Hz	1080i (2ch)	1080p (multi)
1080p (2ch)	3842x2160 24 Hz	TV&MONIT. Check	EXT. EDID LOAD

<EDID selection on the PM-CR102-U>

TV&MONIT. Check is a function to check the default EDID of the display and save to the input of the PM-FR102-U.

EXT. EDID LOAD is a function that will save the current EDID of the connected display.

Other EDID can be selected to save the EDID to the input of the PM-FR102-U.

This function is most useful when a source is sending a improper resolution or if there is audio malfunction.

(EX. If a source is sending a 1080p with multi channel audio format but the end points only uses a 2ch audio, 1080p (2ch) can be selected and saved to the input to properly pass audio.)

#### 4. System check

This function will let you check if the IC on the system is functioning properly. RX IC / TX IC / Scaler can be checked by pressing left or right button on the front panel. It will be shown as OK if they are functioning properly.

#### 5. Version info

This function will allow to check the current firmware and FPGA version of the unit.

**PM-FR103-U : Wall plate type, 2 Gang Decora style, white finish.**

**Input : Fiber Optic (1 LC)**

**Output : HDMI + RS-232**

**32,808ft, Compatible with PM-FOS4-U output board**



**PM-FR103-U : PureMedia Fiber Optic (1 LC) to HDMI Extender Receiver, Wall plate**

**Front Connection Ports:**

**Back Connection Ports:**



**Receiver Input Signal Characteristics**

Input Signal	Description (Symbol)	Unit	Min	Typical	Max	Remarks
DC input	DC Voltage	VDC	11.5	12	12.5	
	Power Consumption	Watts	13.5	13.8	14.4	
Emission Center Wavelength	$\lambda_{c1}$	nm	1260	1310	1360	
	$\lambda_{c2}$		1480	1550	1580	

**Receiver Output Signal Characteristics**

Output Signal	Description	Unit	Min	Typical	Input Signal	Remarks
HDMI Output (19Pin)	Differential Output	mVp-p	400		600	TMDS Interface

**PureMedia Fiber Optic Receiver Compatibility Chart**

Receivers Compatibility	PM-FR101-U	PM-FR102-U	PM-FR103-U
PureMedia Modular Extender Compatibility	PM-FT101-U PM-FT102-U PM-FT103-U	PM-FT101-U PM-FT102-U PM-FT103-U	PM-FT101-U PM-FT102-U PM-FT103-U
PureMedia RF Extender Compatibility	PM-FT101-U-RF PM-FT102-U-RF	PM-FT101-U-RF PM-FT102-U-RF	PM-FT101-U-RF PM-FT102-U-RF
PureMedia Matrix Board Compatibility	PM-FOS4-U	PM-FOS4-U	PM-FOS4-U

## Operation and Reliability Specification

---

### 1. Operating Environment

Temperature : 50F ~ 104F (10 °C ~ 40 °C)

Humidity : 10% ~ 80%

Altitude : 3,000m Max.

### 2. Transit Environment

Temperature : -13F ~ 140F (-25 °C ~ 60 °C)

Humidity : 5% ~ 95%

Altitude : 15,000m Max.

### 3. Storage Environment

Temperature : -4F ~ -49F (-20 °C ~ 45 °C)

Humidity : 5% ~ 95%

Altitude : 3,000m Max.

### 4. Reliability

MTBF: 90% at over 50,000 hours aging test



In compliance with LCD Monitor reliability test standard



## Chapter 3. Installation and Operating Instruction

### 3.1 Installation Connection Instruction

1. Turn off both the video source and the display before connecting any cables
2. Connect LC terminated fiber optic cable between transmitter and receiver according to the picture below;

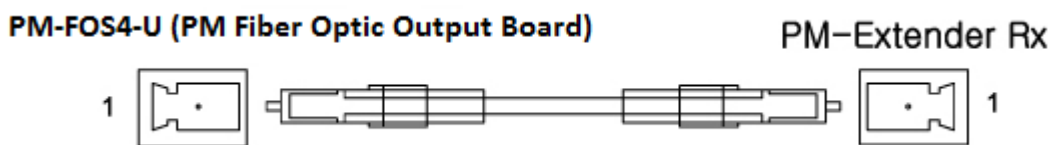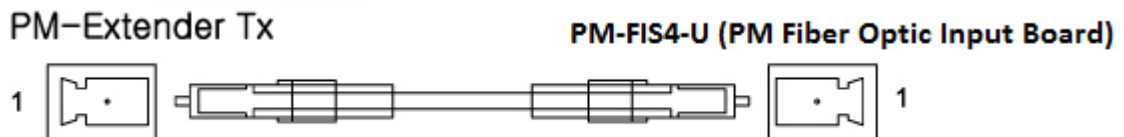

3. Connect DVI, HDMI, or VGA cable between the source and the transmitter AND the receiver (or PM-FIS4-U, PureMedia Fiber Optic input board, and PM-FOS4-U, PureMedia Fiber Optic output board) and the display
4. Connect the power supply unit to both transmitter and receiver module
5. Turn on display
6. Turn on source

## 3.2 Operating Instruction

### EDID

PM series Extenders provide real time EDID management system; easy and fail safe way to handle EDID.

### What's EDID?

**Extended Display Identification Data (EDID)** is an information set that digital display provides to describe its capabilities to a Video source. Video source will know what kinds of displays are connected and it will determine which resolution to Output according to the EDID information received from the display.

The EDID normally includes manufacturer name and serial number, sets of capable resolution including native resolution, supported timing, pixel mapping data (for digital displays only) and etc.

In a digital connectivity environment; in order to support the maximum resolution of connected monitor, EDID handshake is a critical because improper EDID handshake between sources to the display will result in no image on the display.

EDID handshake may sound simple; however, with multiple peripheral devices within the chain, display's EDID information easily get lost or blocked while it is traveling to the source device.

PureMedia Extenders provide Auto EDID management system to meet today's sophisticated digital connectivity integration environment.

## 3.3 Cable Termination


- **RS-232 cable**

### RS-232 Cable Termination

3-pin Phoenix connector is used for RS-232 communication between PureMedia extender Tx/Rx to the devices that are attached.

Pin	RS-232
1	Tx
2	Rx
3	Ground

\* Pinout from the left

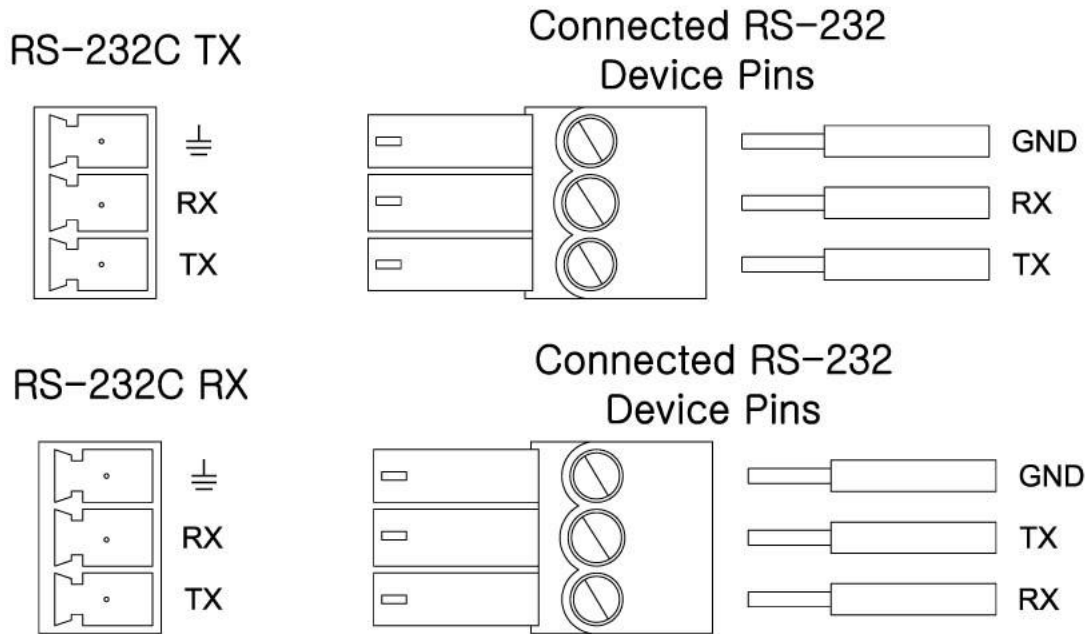

**Connector Pin Assignment**

**DC Input**

Part Number	Pin No.	Description	Remark
ECH350R-03	1	VCC( DC12V)	
	2	GND	
	3	GND	

**RS232**

Part Number	Pin No.	Description	Remark
ECH350R-03	1	TXD	
	2	RXD	
	3	GND	

**DVI-D Input & Output**

Part Number	Pin No.	Description	Remark
DVI-D 29pin	1	TMDS DATA 2M	
	2	TMDS DATA 2P	
	3	TMDS DATA 2/4 Shield	
	4	TMDS DATA 4M(N.C)	
	5	TMDS DATA 4P(N.C)	
	6	DDC Clock	
	7	DDC Data	
	8	N.C	
	9	TMDS DATA 1M	

	10	TMDS DATA 1P	
	11	TMDS DATA 1/3 Shield	
	12	TMDS DATA 3M(N.C)	
	13	TMDS DATA 3P(N.C)	
	14	5V	
	15	GND	
	16	Hot Plug Detect	
	17	TMDS DATA 0M	
	18	TMDS DATA 0P	
	19	TMDS DATA 0/5 Shield	
	20	TMDS DATA 5M(N.C)	
	21	TMDS DATA 5P(N.C)	
	22	TMDS DATA Clock Shield	
	23	TMDS Clock P	
	24	TMDS Clock M	

## HDMI Input &amp; Output

Part Number	Pin No.	Description	Remark
HDMI 19pin	1	TMDS DATA 2P	
	2	TMDS DATA 2 Shield	
	3	TMDS DATA 2M	
	4	TMDS DATA 1P	
	5	TMDS DATA 1 Shield	
	6	TMDS DATA 1M	
	7	TMDS DATA 0P	
	8	TMDS DATA 0 Shield	
	9	TMDS DATA 0M	
	10	TMDS Clock P	
	11	TMDS Clock Shield	
	12	TMDS Clock M	
	13	CEC	
	14	RESERVED	
	15	DDC Clock	
	16	DDC DATA	
	17	GND	
	18	+5v	
	19	Hot Plug Detect	

## Chapter 4. Additional Information

### **Manufacturer's Warranty (5-Year)**

PureLink warrants this PureMedia products to be free from defects in workmanship and materials, under normal use and service, for a period of five (5) years parts for ,and three (3) years on labor from the date of purchase from PureLink or its authorized resellers.

If the product does not operate as warranted during the applicable warranty period, PureLink shall, at its option and expense, execute one of the following as necessary:

1. Repair the defective product or part
2. Deliver to customer and equivalent product or part to replace the defective item
3. Refund to customer the purchase price paid for the defective product

All products that are replaced become the property of PureLink. Replacement products may be new or reconditioned. Repaired or replacement products or parts come with a 90-day warranty or the remainder of the warranty period. PureLink shall not be responsible for any software, firmware, information, or memory data loss of contained in, stored on, or integrated with any products returned to PureLink for repair under warranty.

### **Customer Service**

Any customer service inquiries can be submitted electronically through the Q&A form on our website at [www.purelinkav.com](http://www.purelinkav.com). For immediate assistance please contact us at (201) 488-3232 to reach our customer care or tech support team.

## **FCC/CE Statement**

This device complies with part 15 of FCC Rules and EN 55022/55024/61000-3 for CE certification. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must not accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 and 2 of FCC Rules and EN 55022/55024/61000-3 for CE certification. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction guide, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult a service representative for help.

Properly shielded and grounded cables and connectors must be used in order to comply with FCC/CE emission limits. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **UL Statement**

This device has completed a UL Commercial Inspection and Testing Services for the multimode HDMI cable complied with VW-1 under UL 758. It is validated by the UL file number SV2038 and project number 04CA05353.