


PureLink + Q-SYS™

8X8/4X4 HDMI TO HDBASET MATRIX SWITCHER W/ POE



HTX-8800-U (TOP) | HTX-4400-U (BOTTOM)

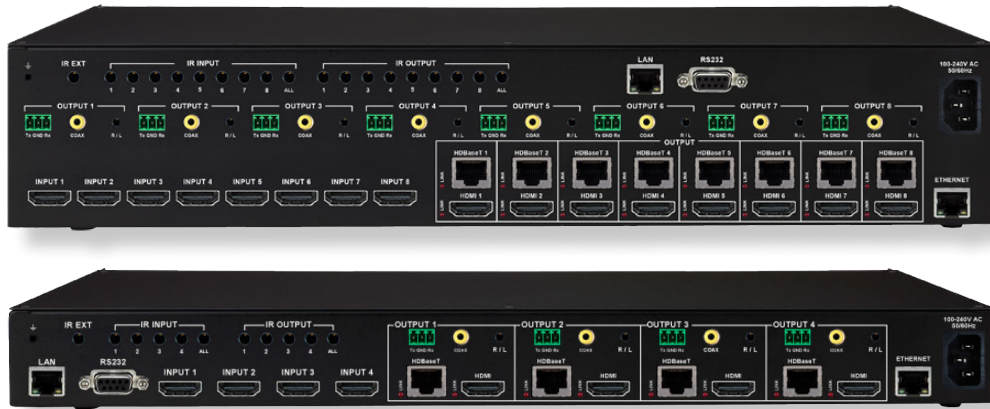

HTX-8800-U / HTX-4400-U

- HTX-8800-U: (8) HDMI inputs, (8) HDBaseT™ outputs, and (8) mirrored HDMI outputs
- HTX-4400-U: (4) HDMI inputs, (4) HDBaseT™ outputs, and (4) mirrored HDMI outputs
- HDCP 2.2
- Supports resolutions up to 4K@30Hz
- Supports distances up to to 330 ft. (100 m) via CATx

HTX-QSYS

Via Q-SYS, intuitive setup and control of switching, audio, presets, diagnostics, and more

PureLink

BEYOND 4K

Purelink AV Matrix Switchers HTX-8800/HTX-4400

Control | General | EDID | Status

Control

	Input 1	Input 2	Input 3	Input 4	Input 5	Input 6	Input 7	Input 8
Output 1	1 -> 1	2 -> 1	3 -> 1	4 -> 1	5 -> 1	6 -> 1	7 -> 1	8 -> 1
Output 2	1 -> 2	2 -> 2	3 -> 2	4 -> 2	5 -> 2	6 -> 2	7 -> 2	8 -> 2
Output 3	1 -> 3	2 -> 3	3 -> 3	4 -> 3	5 -> 3	6 -> 3	7 -> 3	8 -> 3
Output 4	1 -> 4	2 -> 4	3 -> 4	4 -> 4	5 -> 4	6 -> 4	7 -> 4	8 -> 4
Output 5	1 -> 5	2 -> 5	3 -> 5	4 -> 5	5 -> 5	6 -> 5	7 -> 5	8 -> 5
Output 6	1 -> 6	2 -> 6	3 -> 6	4 -> 6	5 -> 6	6 -> 6	7 -> 6	8 -> 6
Output 7	1 -> 7	2 -> 7	3 -> 7	4 -> 7	5 -> 7	6 -> 7	7 -> 7	8 -> 7
Output 8	1 -> 8	2 -> 8	3 -> 8	4 -> 8	5 -> 8	6 -> 8	7 -> 8	8 -> 8
ARC	1	2	3	4	5	6	7	8

Debug Output

CONTROL

Purelink AV Matrix Switchers HTX-8800/HTX-4400

Control | General | EDID | Status

General

	1	2	3	4	5	6	7	8
HDMI INPUT	●	●	●	●	●	●	●	●
HDMI OUTPUT	●	●	●	●	●	●	●	●
HDBT OUTPUT	●	●	●	●	●	●	●	●

● Power

● Beep

Reboot

Debug Output

GENERAL

Purelink AV Matrix Switchers HTX-8800/HTX-4400

Control | General | EDID | Status

EDID

INPUT 1: Refresh

INPUT 2:

INPUT 3:

INPUT 4:

Set EDID Mode to Set

Set EDID Mode to Set

Debug Output

EDID

Purelink AV Matrix Switchers HTX-8800/HTX-4400

Control | General | EDID | Status

Status

Network Configuration

DHCP Refresh

IP

Subnet

Gateway

Save Changes

Status Log

Video Status Audio Status

HDCP Status Clear

Debug Output

STATUS