
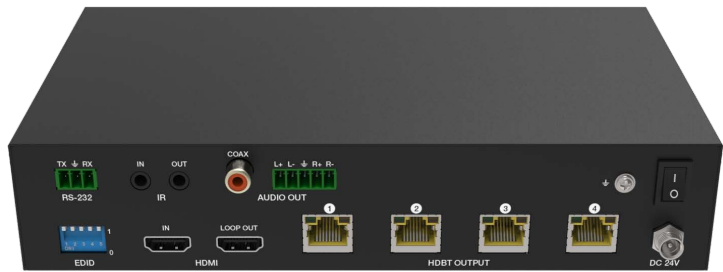


# HT-140U

4K60 1X4 HDBASET DISTRIBUTION SYSTEM

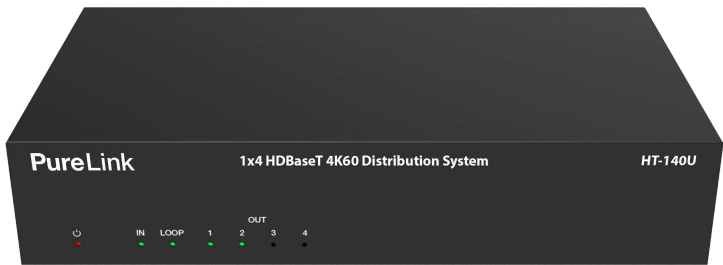

## Technical Specifications

|             |  |
|-------------|--|
| INPUT       | HDMI 2.0b 4K60 4:4:4 HDR, HDR10+, HLG, Dolby Vision. HDMI Loop Out on TX                       |
| HDCP        | 1.3, 1.4, 2.2  |
| OUTPUT      | 4x HDBaseT: 120 meters extension @ 4K60, 150 meters extension @ 1080P60 CAT6/6a/7              |
| AUDIO       | 7.1 passthrough TX: SPDIF digital audio extraction, balanced analog stereo extraction          |
| NETWORK     | 1x 1G RJ45: WiFi 802.11 a/b/g/n/ac   |
| CONTROL     | HDBaseT extension of bidirectional IR and RS-232 API control and feedback                      |
| EDID        | 30+ EDID tables settable by rear panel switches  |
| DIAGNOSTICS | LED: Power [TX/RX], HDMI In [TX], HDMI Loop [TX], HDBaseT outputs [TX], HDBaseT in [RX]        |
| POWER       | Captive 24VDC [TX], 100-240V 50/60Hz UL power adapter included, 35W max draw PoC from TX to RX |
| TEMPERATURE | 0 to 40 C operating, -20 to -60 C storage, 20 to 90 % RH non condensing                        |
| DIMS/WEIGHT | TX: 220mm x 130mm x 40mm, 853g RX: 140mm x 65mm x 18mm   |