


# HWCE III

4K60 Wallplate Extender Switching System with RX local Input



The HWCE III HDBaseT extender system provides 130 feet of full 4K60 4:4:4 HDR10+ extension, or 230 feet at 1080P60. The wallplate transmitter is powered by the receiver (PoC), and allows manual or automatic switching (last or currently connected, with HDMI priority) between the HDMI and USB-C inputs. The Receiver provides a local HDMI 4K60 input.

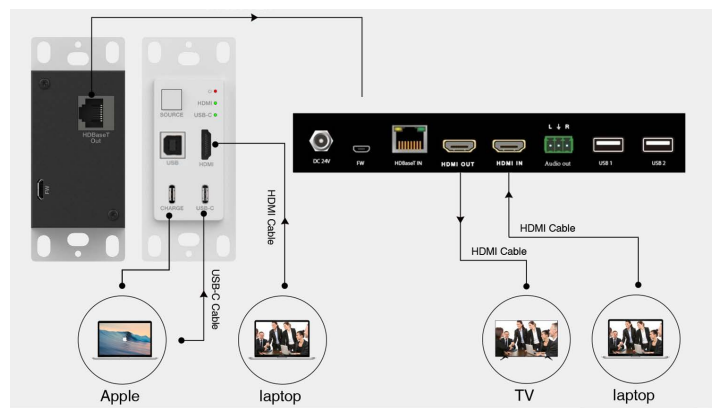

## Technical Specifications

INPUT	HDMI 2.0b on TX and RX, USB-C on TX	4K60 4:4:4 HDR, HDR10+, HLG, Dolby Vision. USB-C
HDCP	2.2	
OUTPUT	HDBaseT: 4K60 4:4:4 @ 130 FT, 1080P60 @ 230 FT	CAT6A/CAT7
AUDIO		LPCM, Dolby Digital/Plus/EX/True HD, DTS, DTS-EX/96/24/High Res/HD Master Audio, DSD
COMPLIANCE	HDMI 2.0b, DisplayPort 1.2	
POWER	RX: 12VDC Power Adapter	TX: Powered (PoE) by RX
TEMPERATURE	0 to 40 C operating, -20 to -60 C storage, 20 to 90 % RH non condensing	
DIMS/WEIGHT TX	33.3mm x 65.7mm x 68.7mm, 195g	
DIMS/WEIGHT RX	200mm x 98mm x 23mm, 511g	